
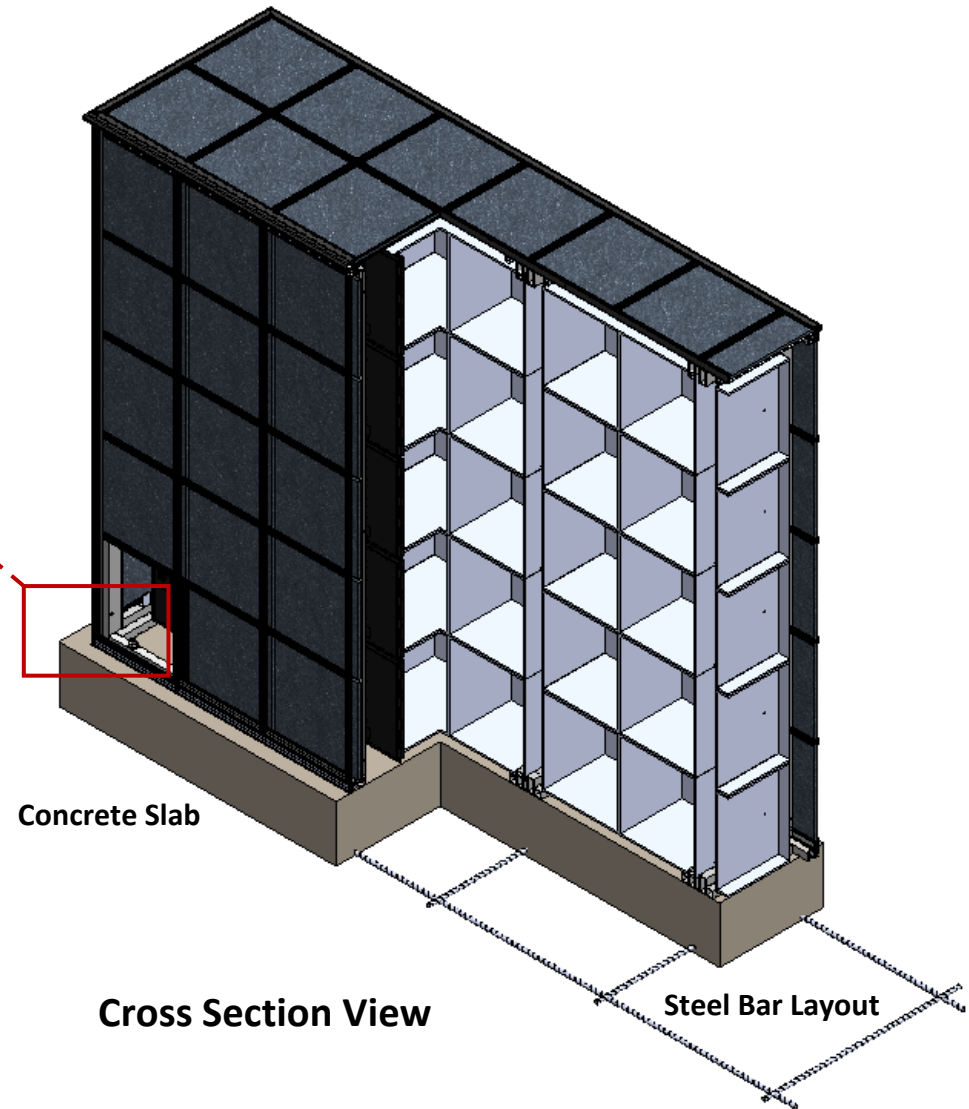


Manufacturer's Recommendations – Concrete Slab Construction & Mounting

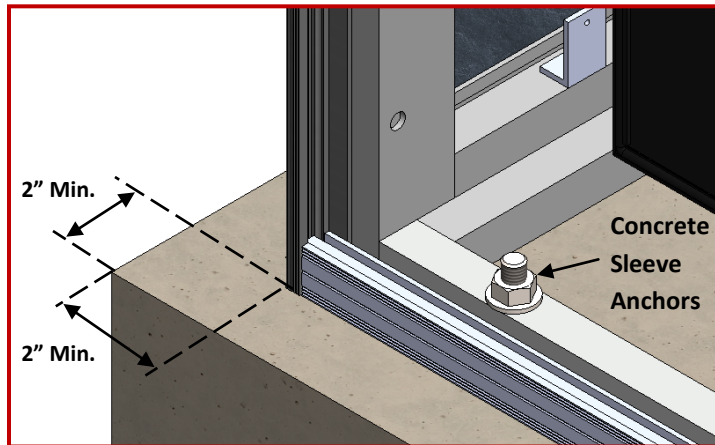

Notes:

1. Concrete slab thickness: typical 4" – 6" above ground. Please check with your local regulations and building codes as requirements may vary depending on location.
2. Reinforced steel bars are recommended with slab but not required. Please check with your local regulations and building codes for requirements and layout of steel bars. Consult with your local governance for proper permitting. Always use a qualified contractor for concrete framing, pouring, and finishing. Finishing shall be smooth with no brush.
3. Concrete slab shall overhang with a 2" minimum distance around perimeter of unit.
4. Mount columbarium unit to slab with 4" long minimum concrete sleeve anchors. Sleeve anchors are required at each corner of unit. Additional sleeve anchors can be used but not recommended. **J-bolts are not recommended, do not use!**